metra installation instructions mazda 6


Download metra installation instructions mazda 6

1 Disconnect the negative battery terminal to prevent an accidental short circuit.

2 Unscrew the shift knob counter clockwise to remove. (Figure A)

3 Unclip and remove the shifter trim panel. (Figure B)

4 Remove (2) Phillips screws from the bottom of the ashtray assembly then unclip and remove the assembly. (Figure C)

5 Unclip and remove the knee panel on the driver's side under the steering column (Figure D) then remove (1) 10 MM bolt from the side of the radio bracket. (Figure E)

A

B

D

C

1
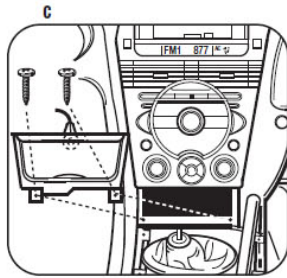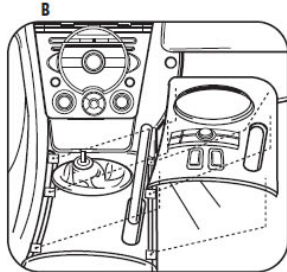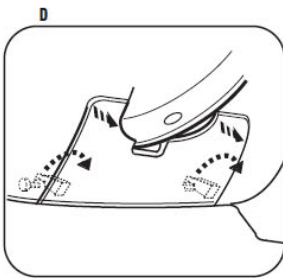
6 Remove (2) Phillips screws from the bottom of the radio/climate control panel. (Figure F)

7 Unsnap radio/climate control panel including radio chassis. Unplug and remove panel and chassis. (Figure G)

8 Remove (3) Phillips screws securing the factory display harness to the radio chassis. Unplug and remove display harness. (Retain display harness for re-use during kit assembly.) (Figure H)

9 Remove (4) screws securing the radio chassis to the radio/climate control panel. (Figure I)

10 Remove (6) screws securing the climate controls from the radio/climate control panel. Unplug and remove the climate controls. (Retain the screws and climate controls for re-use during kit assembly.) (Figure J)

E

FM1   877

F

H

G

FM1   877

2
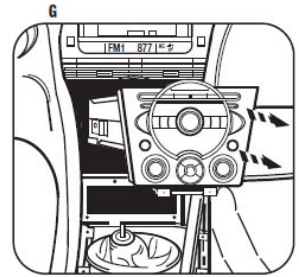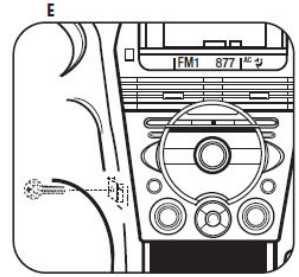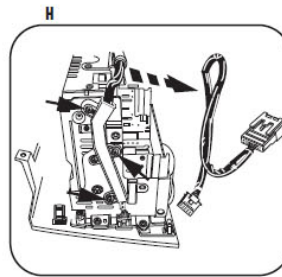
11 Remove (17) screws securing the circuit board to the radio/climate control panel to access the plug for the hazard switch assembly. (Figure K)

12 Remove (2) screws securing the hazard switch to the radio/climate control panel. Unplug and remove hazard switch. (Retain the screws and hazard switch for re-use during kit assembly.) (Figure L)

13 Trim the sub dash to allow clearance for the 99-7510 interface. (Figure M)

Continue to kit assembly.

I

REMOVE (2) SCREWS PER SIDE

J

M

L

K
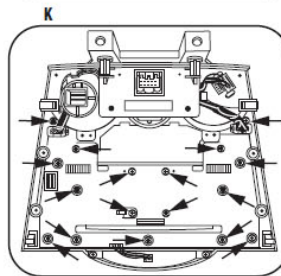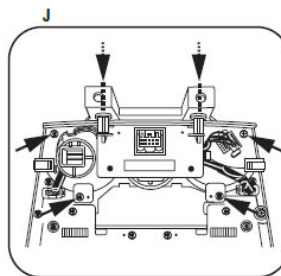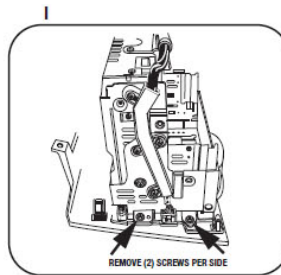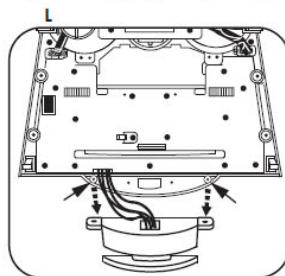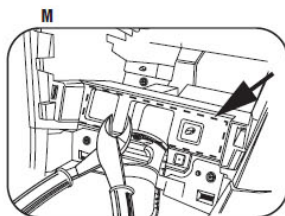
3

SCION XA 2004-2006

1 Disconnect the negative battery terminal to prevent an accidental short circuit.

2 Pull outward on the (3) climate control knobs and remove. (Figure A)

3 Remove (2) Phillips screws from behind the outer two climate knobs. (Figure B)

4 Unsnap and remove the trim pieces on each side of the climate control/ash-tray/pocket assembly. (Figure C)

5 Remove (2) phillips screws from the bottom of the climate control/radio trim panel and unsnap and remove the entire panel. (Figure D)

6 Remove (4) Phillips screws to remove the factory radio.

7 Remove factory brackets from radio. Retain brackets for use during kit assembly.

8 *Continue to kit assembly.*

A

B

C

D
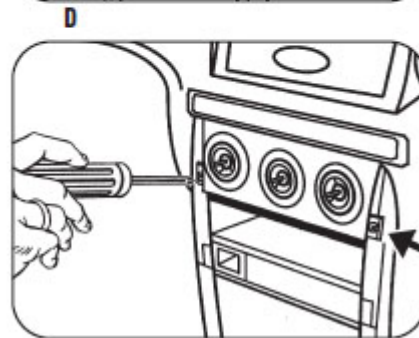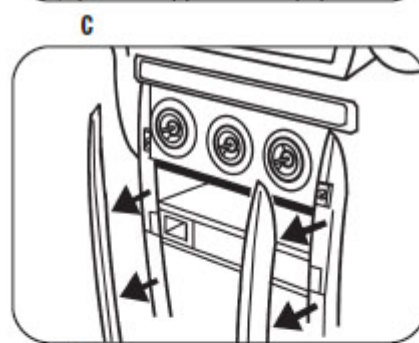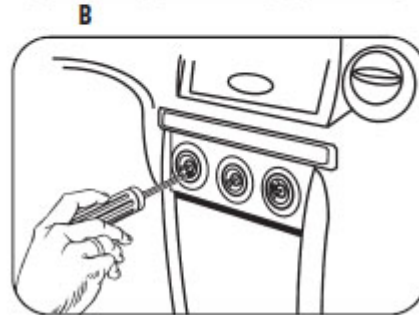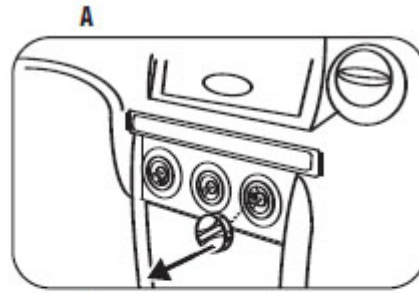
12

. faulty, instructions, kit, mazda, metra. Mazda 2 3 5 6 8 CX7 MX5 RX8 323 Specifics Special Car Speaker Wire. Metra Phone mazda rx8 install kit Phone

99-7523S & 99-7524B Stereo dash kits for 2003-2008 Mazda 6 at http. Metra Mazda 6 2003-2008 kits 99. Mazda 6 2006-2009 Aux Install.

INSTALLATION INSTRUCTIONS FOR PART 99-5700 99-5700. 6 Self Tapping Screws KIT COMPONENTS. Using Metra s 86-5618, pull the.

Installation instructions for 99-7524B M ord metra COPIT TA CTONIC COPOATION RE. INST99-7524B Table of Contents CAUTION! Metra recommends disconnecting the.

INSTALLATION INSTRUCTIONS FOR PART 99-7503. 2003-2005 Mazda 6. Metra recommends making connections as shown below;.

Mazda 6 Forums : Mazda 6 Forum. Interior Modifications install metra dash kit. I don t think anyone has done a write up on the metra kit install.

View and Download Metra Electronics MAZDA 6 2009 99-7511S installation instructions manual online. Metra Electronics Car Stereo System - Car Radio User Manual. MAZDA.

INSTALLATION INSTRUCTIONS FOR PART 99-7523S. Mazda 6 2003-2005 99-7523S A B E C D F G. Metra recomienda

Dash Kit for Select 2006-2008 Mazda Mazda6, Read customer reviews and buy online at Best Buy. 2006-2008 Mazda 6 vehicles enables simple installation of an.

Refine your search for mazda 6 metra dash kit. Search refinements. ⬜ CAR STEREO RADIO DASH INSTALL MOUNTING KIT CD PLAYER DASH INSTALLATION TRIM ⬜ (Fits.